



# 36 Watt Series

**Level VI**

Wall Mount Type  
USA / Japan / Taiwan / Europe / UK / Australia /  
AC Plug Changeable

ATS036T - W X X X □

O / P Voltage ←

U : US Plug / JP Plug  
E : EU Plug  
B : UK Plug  
A : AU Plug  
C : CN Plug  
V : Changeable Plug

### Green Mode

CEC, DoE Level VI, Energy Star, ErP Stage 2, NRCAN & GEMS Level VI  
NO Load Power Consumption Less Than 0.1W

### Features :

- 100-240VAC Universal Input
- Single Output to 36W
- Regulated Output With Low Ripple Noise
- Safety Agency Requirements and EMI/EMS Certified
- Private Label Marking Available
- Modified and Custom Design Available
- 1 Year Warranty

Model	O/P Voltage	O/P Current	Watt
ATS036T-W050□	5.0V	5.00A	25.00W
ATS036T-W075□	7.5V	4.00A	30.00W
ATS036T-W085□	8.5V	3.52A	30.00W
ATS036T-W090□	9.0V	3.34A	30.00W
ATS036T-W120□	12.0V	3.00A	36.00W
ATS036T-W135□	13.5V	2.66A	36.00W
ATS036T-W150□	15.0V	2.40A	36.00W
ATS036T-W160□	16.0V	2.25A	36.00W
ATS036T-W180□	18.0V	2.00A	36.00W
ATS036T-W240□	24.0V	1.50A	36.00W
ATS036T-W480□	48.0V	0.75A	36.00W

### Input

Voltage	100-240VAC	
Line Frequency	50-60Hz	
Current	1.00A Max.	
Protection	Internal Primary Current Fuse , Inrush Limiting	
Configuration	U for US Plug / JP Plug	B for UK Plug
	E for EU Plug	A for AU Plug
	C for CN Plug	
	V for Changeable Plug	

### Output

Load Regulation	±5% ( Typical )
Ripple	1 ~ 2% Vp-p Max. for Output Voltage@ Full Load
Transient Response	0.5mS for 50% Load Change Typical
Hold-up Time	10mS @ Full Load
Protection	Short Circuit Protection / Over Voltage Protection / Over Current Protection
DC Cord	22AWG / 20AWG / 18AWG / 16AWG
Ferrite Core	No (Optional)

### Safety Approvals

For USA- CB / UL / cUL / FCC / PSE / BSMI / LPS  
For Europe & UK - CB / CE / LPS  
For Australia - CB / RCM / LPS

### Electrical


Topology	Switching Flyback
Dielectric Withstand	3000VAC Primary - Secondary
Leakage Current	0.25mA
Efficiency	DoE Level VI, Energy Star, ErP Stage 2, NRCAN & GEMS Level VI Certified
EMI Conduction & Radiation	Compliance to EN55022 Class B
Harmonic Current	Compliance to EN61000-3-2,3
EMS Immunity	Compliance to IEC61000-4-2,3,4,5,6,8,11
MTBF	300,000 Calculated Hours at 25°C, by Telcordia SR-332

### Environmental

Operating Temperature	0 to + 40°C
Storage Temperature	-20 to + 80°C
Relative Humidity	Operating : 20 to 80% RH Storage : 10 to 90% RH
Cooling	Natural Convection Cooling

### Mechanical

Case Dimension	U - L 79 x W 34 xH 74 (mm)
	E - L 79 x W 34 xH 94 (mm)
	B - L 79 x W 49 xH 86 (mm)
	A - L 79 x W 41 xH 82 (mm)
	V - L 79 x W 34 xH 66 (mm)
Weight	160g (Ref.)

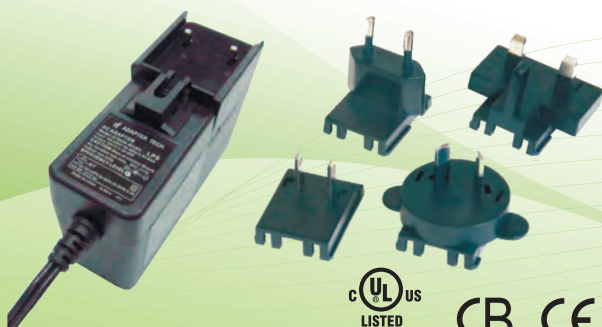

R33154

RoHS