


EC4A

S E R I E S

5-6 WATT 2 : 1 INPUT RANGE DC-DC CONVERTERS

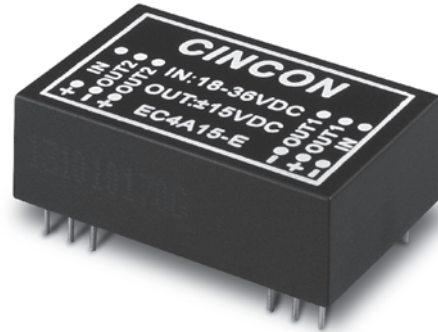

Features

- 5-6W Isolated Output
- 24-Pin DIP Package
- Efficiency to 87%
- 2 : 1 Input Range
- Regulated Outputs
- Pi Input Filter
- Continuous Short Circuit Protection
- Meet EMI EN55022 class A ("-E" model)
- No Tantalum Capacitor inside ("-E" model)
- Wide Operating Temperature Range ("-E" model)
- UL60950-1 Approval for H/HM Versions only and ("-E" model)

MODEL NUMBER ⁽¹⁾	INPUT VOLTAGE ⁽²⁾	OUTPUT VOLTAGE	OUTPUT CURRENT		INPUT CURRENT				% EFF. ⁽³⁾		Capacitor Load max.
				"-E"	NO LOAD		FULL LOAD			"-E"	
EC4A01	9-18 VDC	5 VDC	1000 mA	1000 mA	7.5 mA	7.5 mA	541 mA	514 mA	77	81	4700uF
EC4A02		12 VDC	470 mA	500 mA	7.5 mA	10 mA	573 mA	595 mA	82	84	4700uF
EC4A03		15 VDC	400 mA	400 mA	7.5 mA	15 mA	625 mA	588 mA	80	85	4700uF
EC4A04		±12 VDC	±230 mA	±250 mA	12 mA	12 mA	554 mA	588 mA	83	85	2200uF
EC4A05		±15 VDC	±190 mA	±200 mA	12 mA	18 mA	556 mA	588 mA	81	85	2200uF
EC4A06		±5 VDC	±500 mA	±500 mA	12 mA	12 mA	541 mA	514 mA	77	81	2200uF
EC4A07		3.3 VDC	1000 mA	1200 mA	7.5 mA	7.5 mA	382 mA	429 mA	72	77	4700uF
EC4A11	18-36 VDC	5 VDC	1000 mA	1000 mA	5 mA	5 mA	260 mA	251 mA	80	83	4700uF
EC4A12		12 VDC	470 mA	500 mA	5 mA	8 mA	280 mA	291 mA	84	86	4700uF
EC4A13		15 VDC	400 mA	400 mA	5 mA	8 mA	298 mA	287 mA	84	87	4700uF
EC4A14		±12 VDC	±230 mA	±250 mA	7.5 mA	8 mA	280 mA	291 mA	82	86	2200uF
EC4A15		±15 VDC	±190 mA	±200 mA	7.5 mA	10 mA	293 mA	287 mA	81	87	2200uF
EC4A16		±5 VDC	±500 mA	±500 mA	7.5 mA	8 mA	260 mA	254 mA	80	82	2200uF
EC4A17		3.3 VDC	1000 mA	1200 mA	5 mA	5 mA	186 mA	209 mA	74	79	4700uF
EC4A21	36-72 VDC	5 VDC	1000 mA	1000 mA	2 mA	3 mA	132 mA	126 mA	79	83	4700uF
EC4A22		12 VDC	470 mA	500 mA	2 mA	6 mA	142 mA	144 mA	83	87	4700uF
EC4A23		15 VDC	400 mA	400 mA	2 mA	6 mA	154 mA	144 mA	81	87	4700uF
EC4A24		±12 VDC	±230 mA	±250 mA	3 mA	6 mA	142 mA	144 mA	81	87	2200uF
EC4A25		±15 VDC	±190 mA	±200 mA	3 mA	6 mA	147 mA	144 mA	81	87	2200uF
EC4A26		±5 VDC	±500 mA	±500 mA	3 mA	5 mA	130 mA	126 mA	80	83	2200uF
EC4A27		3.3 VDC	1000 mA	1200 mA	2 mA	2 mA	93 mA	104 mA	74	79	4700uF

NOTE: 1. Suffix "-E" of the models are high efficiency and wide operating temperature version.
 2. Nominal Input Voltage is 12, 24 or 48VDC.
 3. Typical value at nominal input voltage and full load.

Specifications

INPUT SPECIFICATIONS:

Input Voltage Range.....	12V.....	9-18V
	24V.....	18-36V
	48V.....	36-72V
Input Surge Voltage (100ms max.)	12V	25Vdc max.
	24V	50Vdc max.
	48V	100Vdc max.
Input Filter.....	Pi Type	

OUTPUT SPECIFICATIONS:

Voltage Accuracy.....	±2.0% max.	
Voltage Balance (Dual).....	±1.0% max.	
Temperature Coefficient.....	±0.05%/°C	
Ripple and Noise, 20MHz BW ^s	3.3V/5V.....	100mV pk-pk max.
	12V/15V.....	1% pk-pk max.
Short Circuit Protection.....	Continuous	
Line Regulation.....Single/Dual ¹	± 0.5% max.	
Load Regulation.....Single ²	± 0.5% max.	
	Dual ³	± 1.0% max.
Start up time	5 ms max.	

GENERAL SPECIFICATIONS:

Efficiency See Table

Isolation Voltage:

500 VDC min. Standard Models

3K VDC min....(Non-Conductive Black Plastic Only).....Suffix "H" Models

1.5K VDC min.....Suffix "HM" Models

Isolation Resistance 10⁹ ohm min.

Isolation Capacitance 250pF typ.

Switching Frequency 100KHz, min.

Operating Ambient Temperature Range -25°C to +71°C

"-E" models: -40°C to +85°C with Derating

Power de-rating Curve see Figure 1

Case Temperature⁴.....Plastic/Copper case..... 95°C/100°C max.

Cooling Natural Convection

Storage Temperature Range -40°C to +100°C

Humidity 95% RH max. Non condensing

MTBF MIL-STD-217F 2000Khrs typ.

"-E" models: 1800Khrs typ.

DimensionsDIP.....1.25x0.80x0.40 inches(31.8x20.3x10.2 mm)

SMD1.25x0.80x0.45 inches(31.8x20.3x11.4 mm)

S/HS Models⁵...1.25x0.80x0.41 inches(31.8x20.3x10.4 mm)

Suffix "M" Models.....Black Coated Copper with Non-conductive Base

Suffix "S" ModelsSMD package

Weight12.5g

EC4A Series Derating Curve

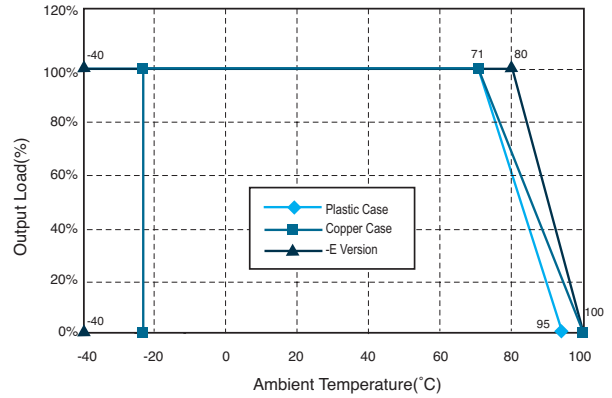


Figure 1 Typical Derating Curve

NOTE:

1. Measured From High Line to Low Line.
2. Measured From Full Load to 10% Load.
3. Measured From Full Load to 1/4 Load.
4. Maximum case temperature under any operating condition should not be exceeded 95°C(Plastic Case), 100°C(Copper Case).
5. The output noise is measured with 0.1µF MLCC across for SMD package.
6. Sand HS models for "E" Version Only.

PIN CONNECTION



500 VDC					1.5K & 3K VDC				
Pin	Single Output		Dual Output		Pin	Single Output		Dual Output	
	DIP	SMD	DIP	SMD		DIP	SMD	DIP	SMD
1,24	+V Input		+V Input		1,24	NP	NC	NP	NC
2,23	NC		-V Output		2,3	-V Input		-V Input	
3,22	NC		Common		4,5	NP	NC	NP	NC
4	NP	NC	NP	NC	9	NC		Common	
5	NP	NC	NP	NC	10,15	NC		NC	
9	NP	NC	NP	NC	11	NC		-V Output	
10,15	-V Output		Common		12,13	NP	NC	NP	NC
11,14	+V Output		+V Output		14	+V Output		+V Output	
12,13	-V Input		-V Input		16	-V Output		Common	
16	NP	NC	NP	NC	20,21	NP	NC	NP	NC
20,21	NP	NC	NP	NC	22,23	+V Input		+V Input	

*NP-NO PIN

*NC-NO CONNECTION WITH PIN

CASE A

NOTE: Pin Size is 0.02" Inch (0.5mm) DIA ±0.05
 All Dimensions In Inches(mm)
 Tolerance Inches: x.xx= ±0.02, x.xxx= ±0.010
 Millimeters: x.x= ±0.5, x.xx= ±0.25

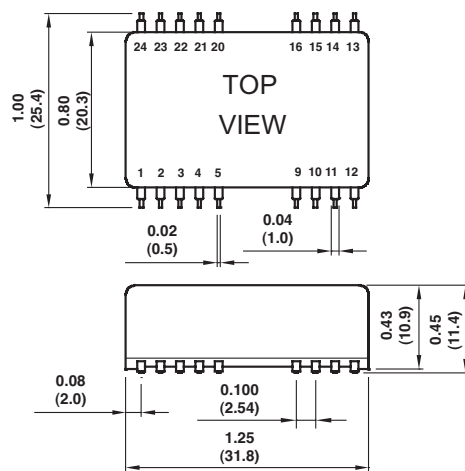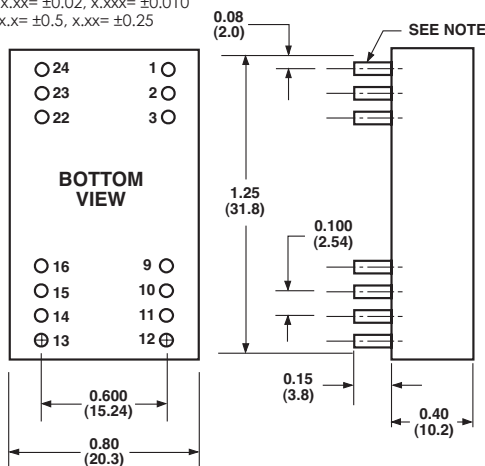

* 0.41(10.4)mm for "E" Version S/HS Models