


Telephone Exchange

solved.
www.aptronic.de



Description

The TA115/48-1,38 is a practical, low-cost, power source. This 48 VDC output power supply is typically used to provide a convenient power source for many IT products. The TA115/48-1,38 power supply is compact and constructed of an impact resistant thermoplastic material for long life operation.

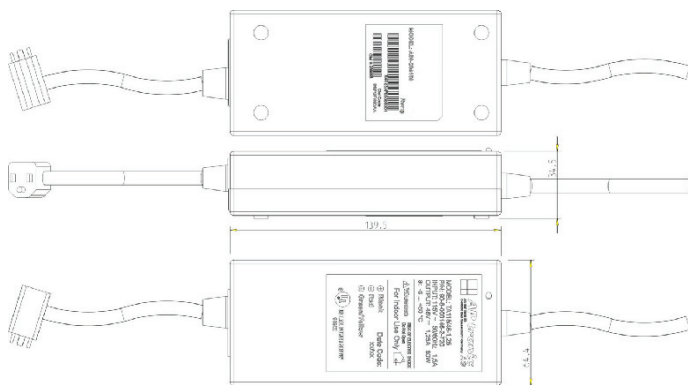

Features

- Economical, compact, power source for light duty IT applications
- Regulated and protected against short-circuits
- Output voltage of 48 VDC to suit most applications 3-conductor power cord to connect to most equipment
- Adapts to standard 3-prong AC convenience receptacle
- Impact-resistant, long-lasting thermoplastic material

Product Mounting

- The TA115/48-1,38 is typically placed on a table or flat surface
- A wall mounting clamp is optional available

Input

- Input Voltage: 115 V_{AC}
- Input Voltage Range: 90 – 132 V_{AC}
- Frequency: 50 – 60 Hz

APtronic US Headquarter
Naples, Florida - USA

Output

- Output Voltage: 48 V_{DC}
- Output Current: 1,38 A

APtronic AG Headquarter
Bad Sassendorf, Germany

- Meets UL60950 Listing requirements
- 2-year warranty

Details

- Ambient Temperature: -5 ... + 40°C

Production site
Dongguan, China

APtronic AG

Your Partner for customized Power Supplies

APtronic AG

An der Helle 26
D-59505 Bad Sassendorf - Lohne
Germany

Phone +49 (0) 2927-9194-0

Fax +49 (0) 2927-9194-50

info@aptronic.de

APtronic
Aktiengesellschaft
Adaptive Power Solutions